

SPECIFICATION OF DDW06/03

Dimensions	
Length/Width/Height	3950*1300*1750 mm
Entry angle	15°
Machine weight	4.5 ton
Operator station	
Operation station	Sunshield canopy frame
Rotational console	0-45°
Control system	Electronic & hyd
Operation controls	Joystick 2
Engine	
Make	Cummins
Rated power	46.3 KW
Rated speed	2200 rpm
Fuel tank capacity	130 L
Hydraulic system	
Max pressure (rotary & carriage)	21 Mpa
Max pressure (control sys.)	16 Mpa
Hydraulic tank capacity	245 L

※ Specifications for reference only subject to change prior to notice.※

VARIETY OF USEFUL DOWN HOLE EQUIPMENT SUPPLIES



Special make drill pipe

Mud mixing & recycling

Cutting type Backreamer

Cone type Backreamer

Beacon housing & drill bit

F5 & Transmitter

Paratrack 2

DW/TXS CONSTRUCTION EQUIPMENT (BEI JING) CO., LTD.

No.6, Huoxing Fifth Street, Huo County Development Area Tongzhou District, Beijing, China.

Postal code: 101109 Tel: +86 10 80582365 Fax: +86 10 80582515 Web: www.dwtxs.cn Email: feishubing@dwtxs.com




DW/TXS

DDW06/03

HORIZONTAL DIRECTIONAL DRILL

DW/TXS CONSTRUCTION EQUIPMENT (BEI JING) CO., LTD.

HDD MACHINES!

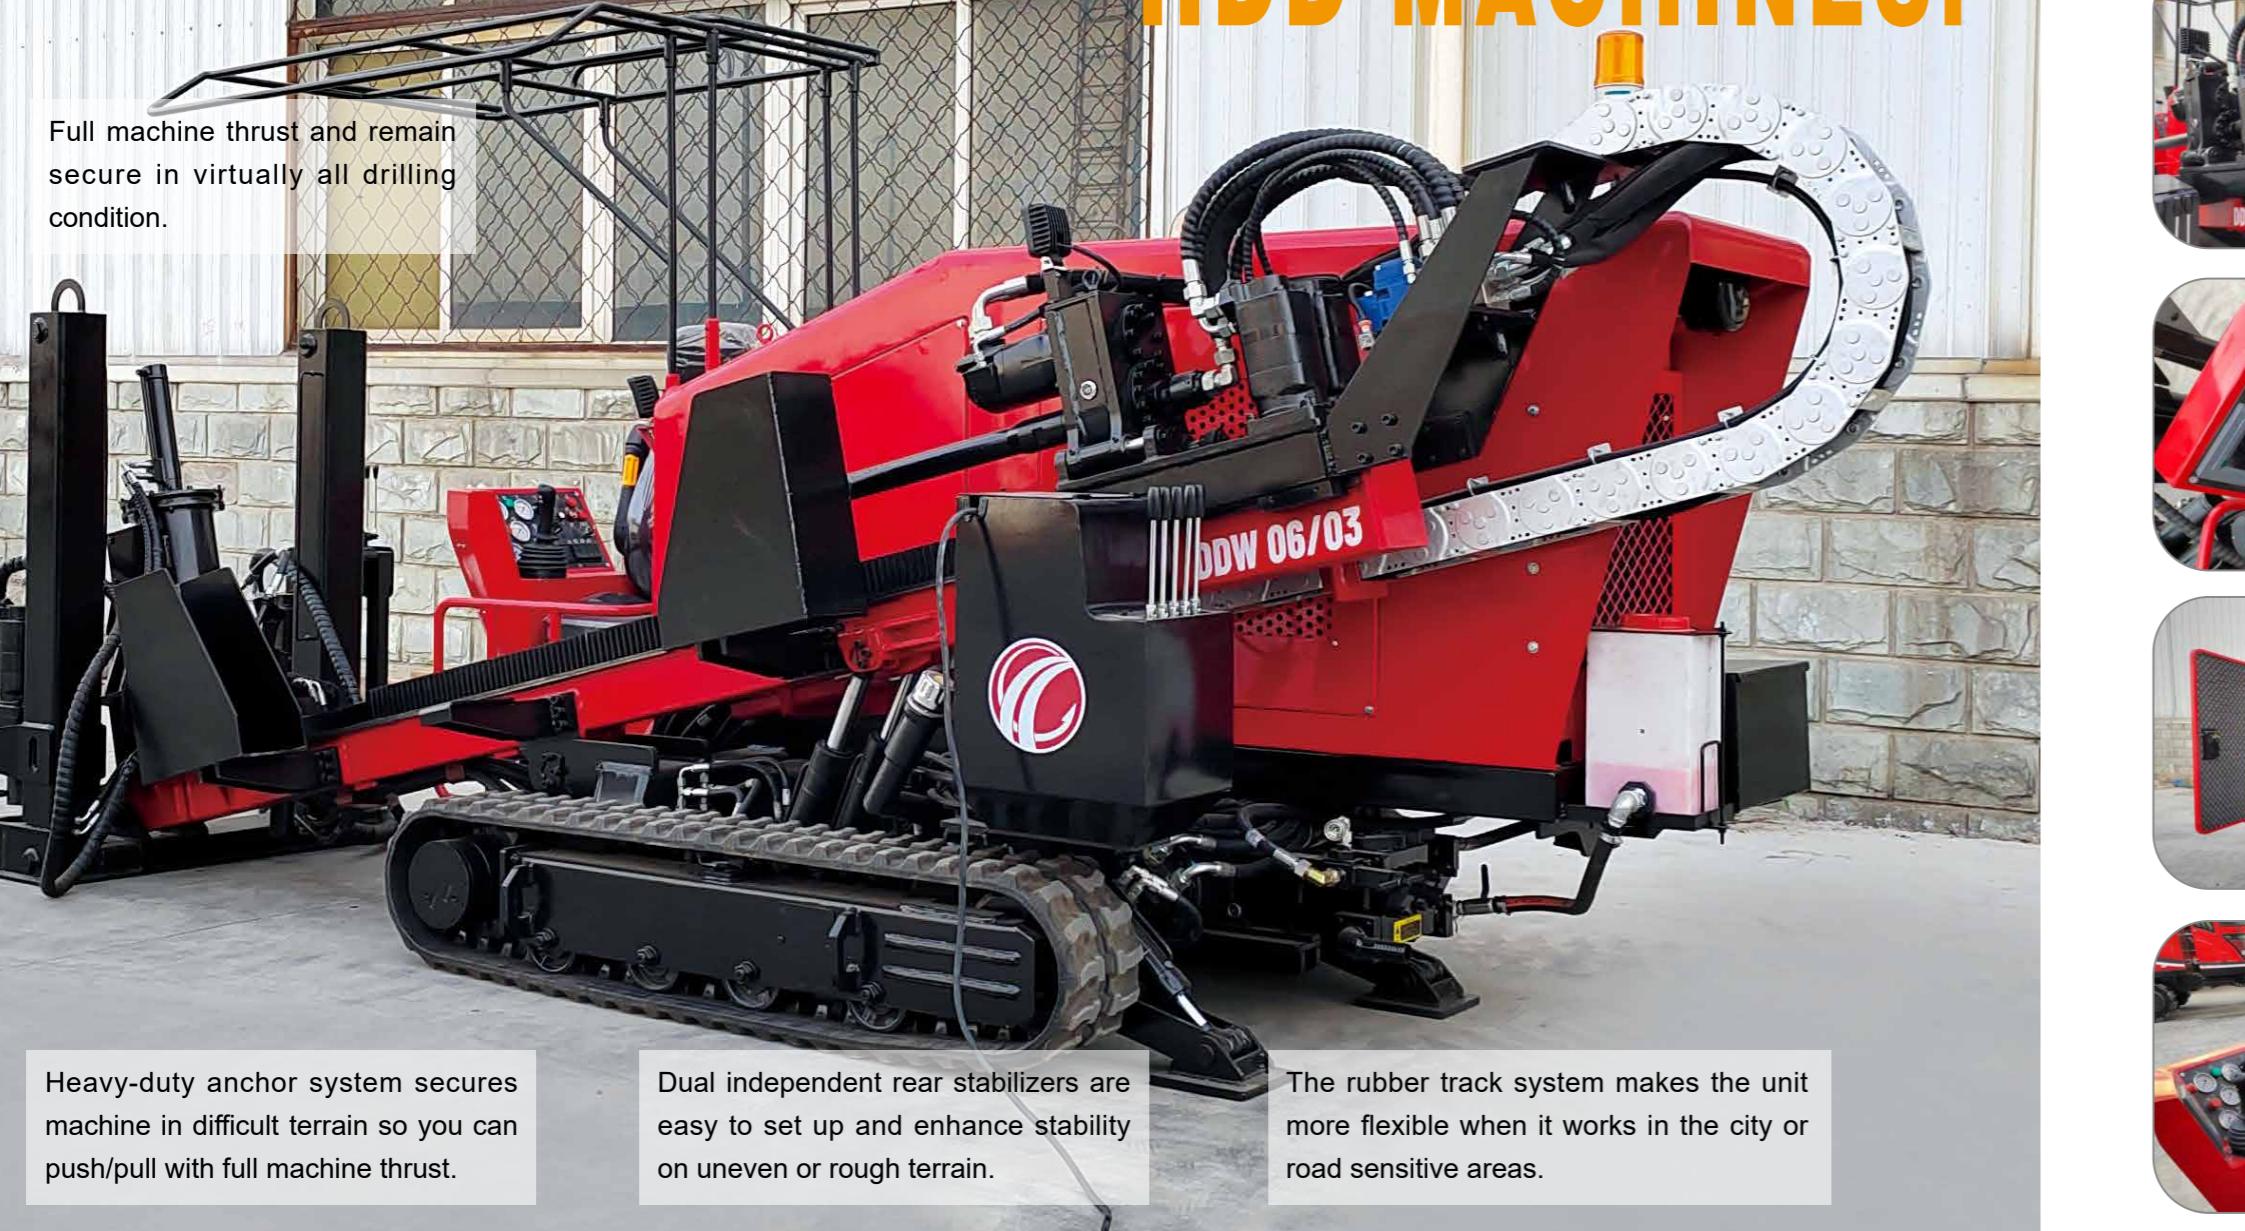

Heavy-duty anchor system secures machine in difficult terrain so you can push/pull with full machine thrust.

Dual independent rear stabilizers are easy to set up and enhance stability on uneven or rough terrain.

The rubber track system makes the unit more flexible when it works in the city or road sensitive areas.



OPERATOR STATION

Rotatable seat provides operator an excellent view of all drill functions and comfortable working experience.



WRENCH SYSTEM

Open-top vise wrenches are angled toward the operator for an excellent view of the tool joint when making up or breaking out pipe.



CONTROL SYSTEM

Cooling system and maintenance access is easily arranged with the unit makes it long time service and little idle downtime for repair.

FLUID PUMP

Onboard, enclosed 80-L/min fluid pump for productive drilling at greater distances.